



W-M1800P

HIGH EFFICIENCY PHOTOVOLTAIC SOLAR MODULE

This module meets industry standards for consumer safety and reliability and is covered by a comprehensive 20 year warranty.

Low-iron tempered glass is designed to resist impact and increase light transmittance, thus improving daily power generation.

Encapsulating the solar cells between Tempered Glass / EVA / Tedlar guarantees a durable protection for the cells during extreme weather conditions.

The strong aluminium frame with pre-drilled mounting holes allow for easy installation.

Each solar module is equipped with a special IP55 junction box and protective bypass diodes.

Furthermore is each solar module submitted to an individual quality inspection, certifying product quality and output power performance.

Modules designed and manufactured according to IEC 61215 & IEC 61730 standards.

APPLICATIONS

- Water pumping •
- Rural Electrification •
- Telecommunication •
- Billboard illumination •
- Grid connected systems •

CONTACT US

36 Sim Street Kempton Park
Gauteng 1619 South Africa

Phone: +27 11 396 3717

<http://www.green-world.co.za>



W-M1800P

TYPICAL PERFORMANCE CHARACTERISTICS

Typical power (Wp)	150	155	160	165	170	175	180
Tolerance (%)	+/- 5%						
Voltage at max.power (V)	33.8	34.1	34.5	34.8	35.1	35.4	35.7
Current at max.power (A)	4.4	4.5	4.6	4.7	4.8	4.9	5
Open circuit voltage (Voc)	40.9	41.3	41.7	42.1	42.5	42.9	43.2
Short circuit current (Isc)	4.75	4.86	4.97	5.08	5.18	5.29	5.4

Standard test conditions: 1000W/m, AM1.5G and 25 degree C

TEMPERATURE COEFFICIENTS


Voltage	-158.40mV / degree C
Current	+1.55mA / degree C
Power	-0.43% / degree C
NOCT (degrees)	45

CELLS

Type	Monocrystalline
Dimensions	125mm x 125mm
Layout	72 cells (6rows x 12cells)


GENERAL INFORMATION

Maximum System voltage	715V
Diodes	3 x 10A bypass
Type of connection	Junction box
Frame	38mm black powder-coated aluminium
Weight (kg)	15
Packaging	2 modules per carton box

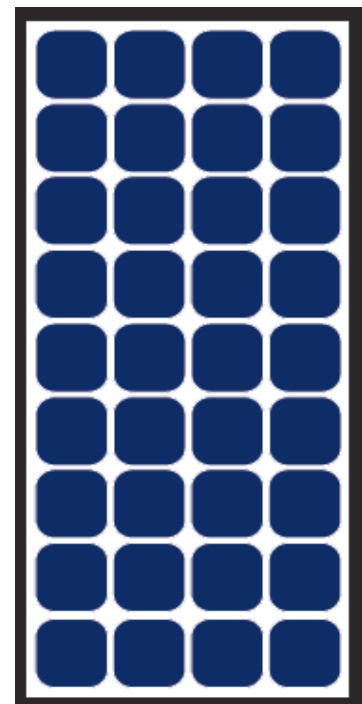

WARRANTY

Product	5 years
Power output	Terrestrial: 20 years / 80% yield Marine: 10 years / 90% yield

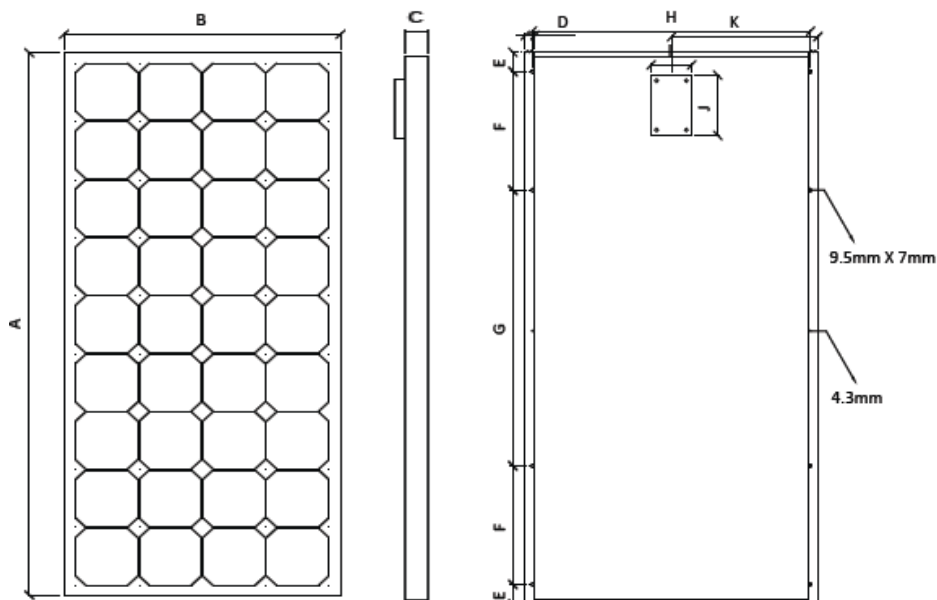

DIMENSIONS

A	1584
B	807
C	38
D	37
E	51
F	325
G	832
H	767
I	115
J	165
K	403.5