



# W-M2200P

HIGH EFFICIENCY PHOTOVOLTAIC SOLAR MODULE

This module meets industry standards for consumer safety and reliability and is covered by a comprehensive 20 year warranty.

Low-iron tempered glass is designed to resist impact and increase light transmittance, thus improving daily power generation.

Encapsulating the solar cells between Tempered Glass / EVA / Tedlar guarantees a durable protection for the cells during extreme weather conditions.

The strong aluminium frame with pre-drilled mounting holes allow for easy installation.

Each solar module is equipped with a pre-wired IP65 junction box, which includes MC equivalent connectors and protective bypass diodes.

Furthermore is each solar module submitted to an individual quality inspection, certifying product quality and output power performance.

Modules designed and manufactured according to IEC 61215 & IEC 61730 standards.

## APPLICATIONS

- Water pumping •
- Rural Electrification •
- Telecommunication •
- Billboard illumination •
- Grid connected systems •

## CONTACT US

36 Sim Street Kempton Park  
Gauteng 1619 South Africa

Phone: +27 11 396 3717

<http://www.green-world.co.za>



# W-M2200P

## TYPICAL PERFORMANCE CHARACTERISTICS

Typical power (Wp)	195	200	205	210	215	220	225	230
Tolerance (%)	+- 5%							
Voltage at max.power (V)	27	27.2	27.4	27.7	28	28.3	28.5	28.8
Current at max.power (A)	7.2	7.4	7.5	7.6	7.7	7.8	7.9	8
Open circuit voltage (Voc)	33.2	33.4	33.6	33.8	34	34.4	34.6	34.9
Short circuit current (Isc)	7.6	7.8	8	8.1	8.2	8.3	8.4	8.5

## TEMPERATURE COEFFICIENTS

Voltage	-115.30mV / degree C
Current	+4.50mA / degree C
Power	-0.46% / degree C
NOCT (degrees)	45

## CELLS



Type	Texturized multicrystalline
Dimensions	156mm x 156mm
Layout	54 cells (6rows x 9cells)

## GENERAL INFORMATION

Maximum System voltage	840V
Diodes	3 x 10A bypass
Type of connection	Pre-wired IP65 junction box with MC equivalent connectors
Frame	35mm black anodized aluminium
Weight (kg)	20
Packaging	2 modules per carton box

## WARRANTY

Product	5 years
Power output	<b>Terrestrial:</b> 20 years / 80% yield <b>Marine:</b> 10 years / 90% yield

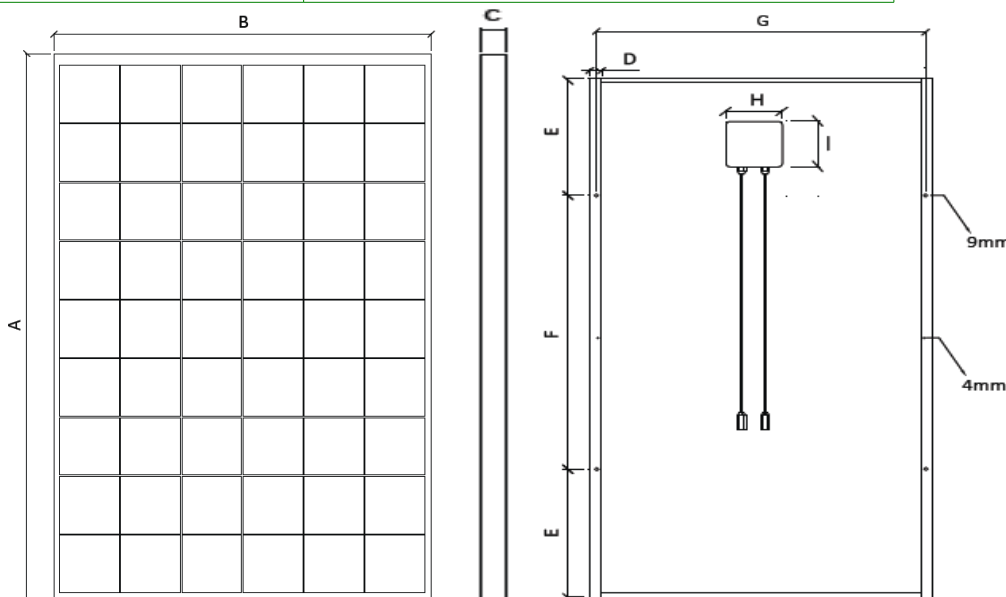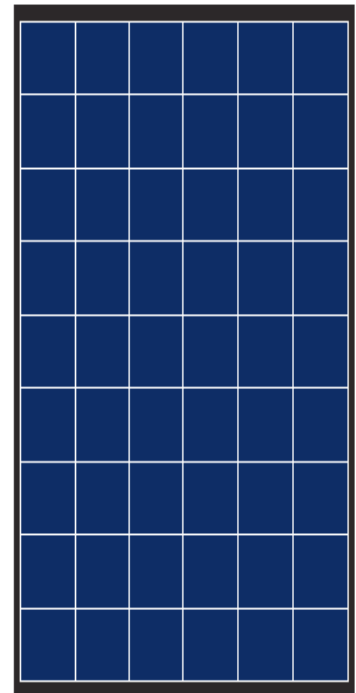

## DIMENSIONS

A	1480
B	991
C	35
D	30
E	340
F	800
G	947
H	93
I	93