



W-M3000P

HIGH EFFICIENCY PHOTOVOLTAIC SOLAR MODULE

APPLICATIONS

- Water pumping •
- Rural Electrification •
- Telecommunication •
- Billboard illumination •
- Grid connected systems •

This module meets industry standards for consumer safety and reliability and is covered by a comprehensive 20 year warranty.

Low-iron tempered glass is designed to resist impact and increase light transmittance, thus improving daily power generation.

Encapsulating the solar cells between Tempered Glass / EVA / Tedlar guarantees a durable protection for the cells during extreme weather conditions.

The strong aluminium frame with pre-drilled mounting holes allow for easy installation.

Each solar module is equipped with a pre-wired IP65 junction box, which includes MC equivalent connectors and protective bypass diodes.

Furthermore is each solar module submitted to an individual quality inspection, certifying product quality and output power performance.

Modules designed and manufactured according to IEC 61215 & IEC 61730 standards.

CONTACT US

36 Sim Street Kempton Park
Gauteng 1619 South Africa

Phone: +27 11 396 3717

<http://www.green-world.co.za>



W-M3000P

TYPICAL PERFORMANCE CHARACTERISTICS

Typical power (Wp)	240	245	250	255	260	265	270	275	280
Tolerance (%)	+/- 5%								
Voltage at max.power (V)	33.5	33.9	34.1	34.3	34.4	34.5	34.7	34.9	35.1
Current at max.power (A)	7.16	7.23	7.33	7.43	7.56	7.68	7.78	7.88	7.98
Open circuit voltage (Voc)	40.2	40.6	40.9	41.1	41.2	41.4	41.6	41.8	42.1
Short circuit current (Isc)	7.88	7.95	8.06	8.18	8.31	8.45	8.56	8.67	8.77

TEMPERATURE COEFFICIENTS


Voltage	-152.64mV / degree C
Current	+4.5mA / degree C
Power	-0.46% / degree C
NOCT (degrees)	45

CELLS

Type	Texturized multicrystalline
Dimensions	156mm x 156mm
Layout	72 cells (6rows x 12cells)


GENERAL INFORMATION

Maximum System voltage	715V
Diodes	3 x 10A bypass
Type of connection	Pre-wired IP65 junction box with MC equivalent connectors
Frame	35mm black anodized aluminium
Weight (kg)	22
Packaging	2 modules per carton box

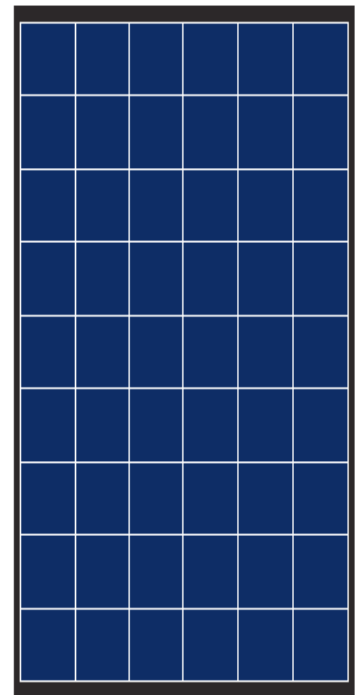

WARRANTY

Product	5 years
Power output	Terrestrial: 20 years / 80% yield Marine: 10 years / 90% yield

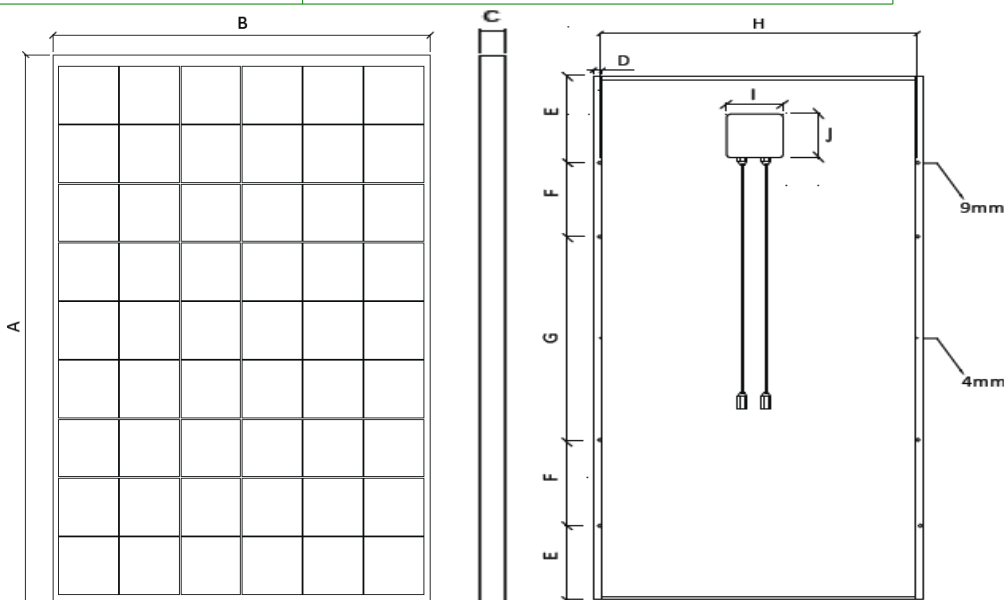

DIMENSIONS	
A	1950
B	991
C	35
D	30
E	325
F	250
G	800
H	947
I	93
J	93